


NOMINAL DIAMETAR DN	MAX. WORK PRESSURE for NP 6 (bar)	
	< 120 °C	120 °C – 180 °C
15 – 250	6	5

NOMINAL DIAMETAR DN	MAX. WORK PRESSURE for NP 16 (bar)	
	< 120 °C	120 °C – 180 °C
15 – 175	16	10
200 – 250	10	6

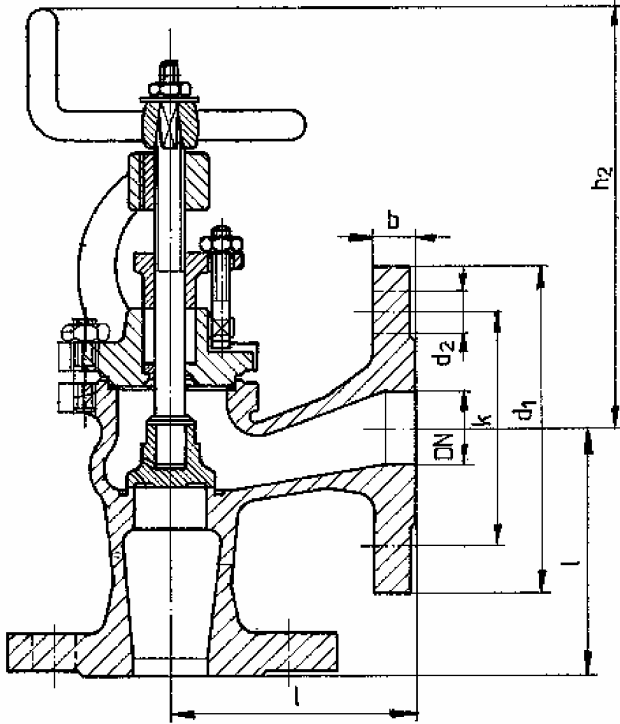

NP 6

NP 16

VERSION B – body: cast iron; internal parts: stainless steel

VERSION C – body: cast iron; internal parts: brass or bronze

VERSION D – body: bronze; internal parts: brass or bronze

VERSION H – body: GGG 40; internal parts: brass or bronze

VERSION K – body: GGG 40; internal parts: stainless steel

NOMINAL DIAMETAR DN	d ₁	b VERSION		k	d ₂	n.	l	h ₂
		B, C, HiK	D					
15	80	12	10	55	11	4	90	177
20	90	14	12	65				
25	100	16	14	75				
32	120			90	14	4	100	
40	130	100	16	18			115	18
50	140	110			20	22	125	
65	160	130	22	24			145	26
80	190	150			24	26	155	
100	210	170	26	28			175	30
125	240	200			28	30	200	
150	265	225	30	32			225	34
175	295	255			32	34	250	
200	320	280	34	36			275	38
250	375	335			36	38	325	

NOMINAL DIAMETAR DN	d ₁	b VERSION		k	d ₂	n.	l	h ₂
		B, C, HiK	D					
15	95	14	12	65	14	4	90	177
20	105	16	14	75				
25	115			85			14	
32	140	18	14	100	18	105		200
40	150	110	20	16		115	22	
50	165	125			22	18		145
65	185	145	24	20			160	26
80	200	160			26	22	180	
100	220	180	28	24			210	30
125	250	210			30	26	240	
150	285	240	32	28			270	34
175	315	270			34	30	295	
200	340	295	36	32			325	38
250	405	355			38	34	375	