

SOMET

R I J E K A


STRAIGHT VALVE, NON-RETURN

Type 2681 (NP 6)

Type 2687 (NP 16)

NOMINAL DIAMETAR DN	MAX. WORK PRESSURE For NP 6 (bar)	
	< 120 °C	120 °C – 180 °C
15 – 200	6	5

NOMINAL DIAMETAR DN	MAX. WORK PRESSURE For NP 16 (bar)	
	< 120 °C	120 °C – 180 °C
15 – 175	16	10
200	10	6

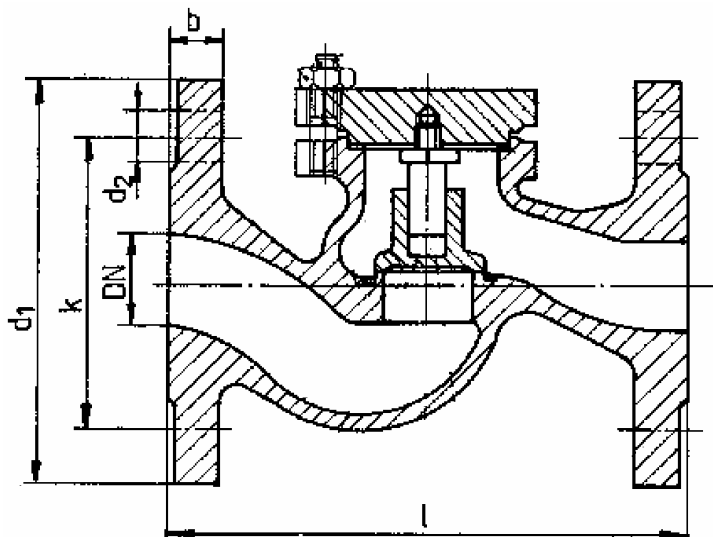

VERSION B – body: cast iron; internal parts: stainless steel

VERSION C – body: cast iron; internal parts: brass or bronze

VERSION D – body: bronze; internal parts: brass or bronze

VERSION H – body: GGG 40; internal parts: brass or bronze

VERSION K – body: GGG 40; internal parts: stainless steel

NP 6

NOMINAL DIAMETAR DN	d ₁	b VERSION		k	d ₂	n.	l
		B, C, H i K	D				
15	80	12	10	55	11	4	130
20	90	14	12	65			150
25	100			75			160
32	120	16	14	90	14	4	180
40	130			100			200
50	140			110			230
65	160	18	16	130	18	8	290
80	190			150			310
100	210			170			350
125	240	20	18	200	18	8	400
150	265			225			480
175	295			255			550
200	320	22	20	280			

NP 16

NOMINAL DIAMETAR DN	d ₁	b VERSION		k	d ₂	n.	l
		B, C, H i K	D				
15	95	14	12	65	14	4	130
20	105	16		75			150
25	115			85			160
32	140	18	14	100	18	4	180
40	150			110			200
50	165			125			230
65	185	20	16	145	18	8	290
80	200			160			310
100	220			180			350
125	250	26	20	210	22	8	400
150	285			240			480
175	315			270			550
200	340	30	24	295	22	12	600