


DESIGN A - VALVE DISC RUBBER PACKING (FOR WATER)

DESIGN B - VALVE DISC "TEFLON" PACKING (FOR OIL AND PETROL OIL)

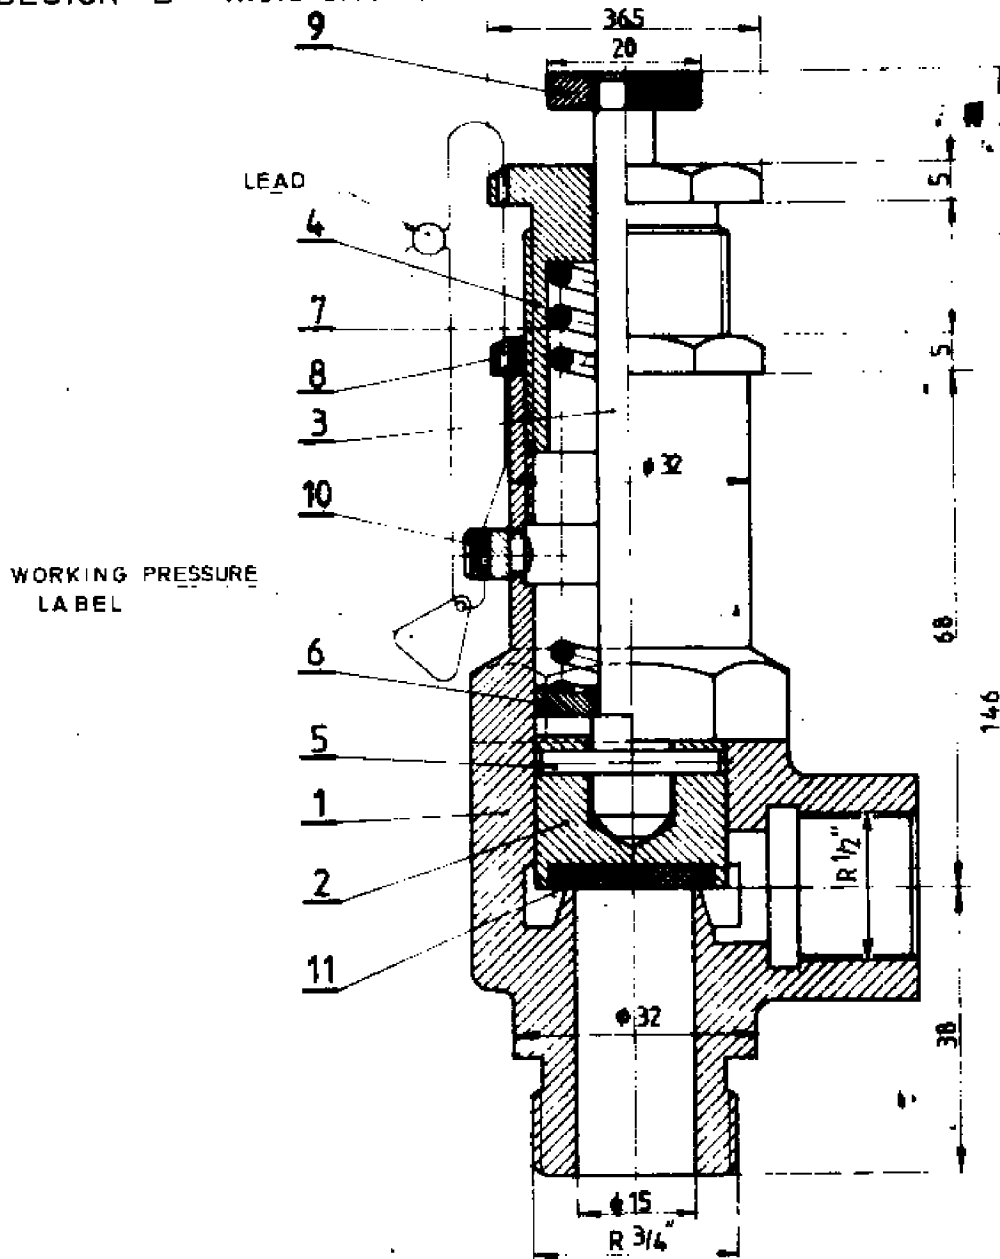

NOTE:  
FOR INSTALLATION ON HEAT EXCHANGERS AND PRESSURIZED VESSELS, THE SAFETY VALVE MUST HAVE SUCH FLOW RATE THAT PRESSURE IN THE VESSEL MUST NEVER EXCEED 10% OF WORKING PRESSURE. VALVE TESTING AND REGULATION WILL BE CARRIED OUT ON THE VESSEL ITSELF

MARKING EXAMPLE OF SAFETY VALVE OF "A" DESIGN  
VALVE A - SB 7382

1	PACKING	15	SB 7392	TEFLON	11
1	PACKING	15	SB 7392	RUBBER	
1	SCREW	6	SB 7391	Cu Zn 39 Pb 2	10
1	NUT	15	SB 7390	Cu Zn 39 Pb 2	9
1	COUNTERNUT	15	SB 7389	Cu Zn 39 Pb 2	8
1	SPRING	31 X 18	SB 3059	KLAVIR ŽICA	7
1	PLATE	15	SB 7388	Cu Zn 39 Pb 2	6
1	PIN	3 X 24	JUS M.C 2.202	Cu Zn 39 Pb 2	5
1	NUT	15	SB 7387	Cu Zn 39 Pb 2	4
1	SPINDLE	15	SB 7386	Cu Zn 39 Pb 2	3
1	BODY	15	SB 7385	Cu Zn 39 Pb 2	2
1	HOUSING	15	SB 7384	PCuSn9 Pb5 Zn 5	1

A B	DENOMINATION	STANDARD	MATERIAL	POS.	MARK OF SEMI PRODUCTS MODEL AND MOULDS
PC					